

MZ-DHIR-7607


600 TVL IR Dome Camera



Key features

- 1/3" Sony super HAD II Sensor
- Smart 40IR LEDs
- 600 TVL Horizontal Resolution
- 50 dB S/N Ratio
- Digital WDR
- Super Low Illumination
- True Day/Night
- OSD Menu

Dimensions (Unit in mm)

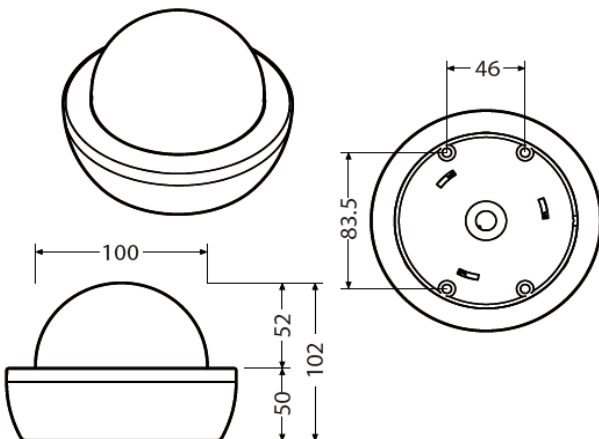

Specification

DESCRIPTION	NTSC	PAL
IMAGE SENSOR	1/3" Sony Super HAD2	
SCANNING SYSTEM	2:1 Interlace	
SYNCHRONIZATION	Internal	
RESOLUTION	600 TV Lines	
VIDEO OUTPUT	Composite (1.0Vp-p/75Ohm)	
S/N RATIO	50dB	
LENS	Vary-Focal Lens 2.8 ~ 12mm	
ELECTRONIC SHUTTER	1/60 ~ 100,000sec	1/50 ~ 100,000sec
MIN ILLUMINATION	0.12Lux(15IRE) @F1.2/ 0.0002Lux(15IRE) @F1.2	
GAMMA	R=0.45.0.55.0.65 USER	
AUTO GAIN CONTROL	Off/Low/Middle/High	
WHITE BALANCE	ATW/AWC/Push/Manual	
DAY & NIGHT	Auto, Color, B&W, EXT, EXT2	
DNR	3D-DNR/Off, Low, Mid, High	
PRIVACY/ Motion	8 Windows	
BLC	On/Off	
D-WDR	Digital WDR, On/Off (WDR Level)	
MIRROR	On/Off	
IR LED	40 PCs	
LANGUAGE	11 Languages	
OSD CONTROL	OSD Switch	
OPERATING TEMP	-10 C to 50 C	
OPERATING HUMIDITY	Up to 80% RH	
POWER CONSUMPTION	Max 3 W	
POWER SUPPLY	DC 12V:1.5A	

Available models

PAL: MZ-DHIR-7607P

NTSC: MZ-DHIR-7607N